




TECHNOLOGY SOLUTION

Mechanical and Fluid Systems

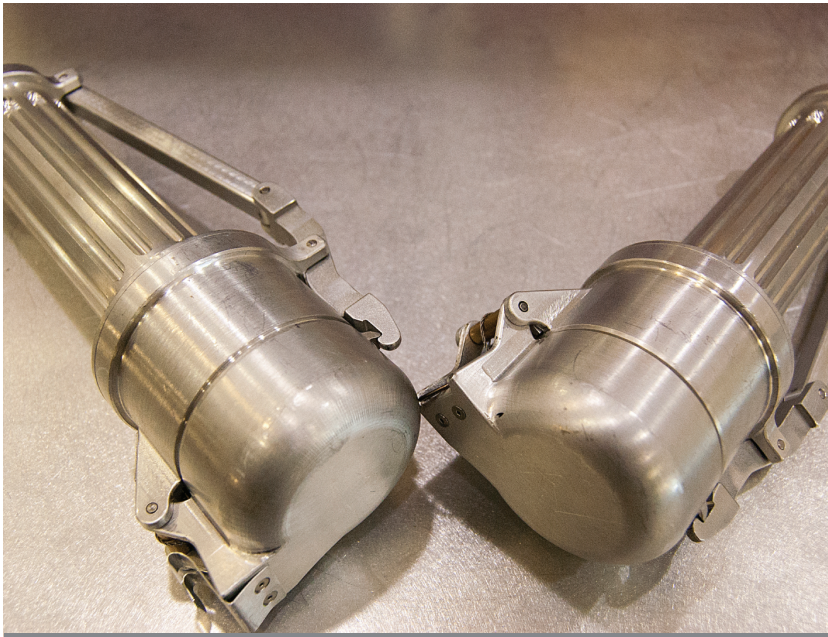


Harsh Environment Protective Housings

Novel housing for electrical and fluid connectors

NASA's Kennedy Space Center seeks partners interested in a novel ruggedized housing for electrical or fluid umbilical connector that prevents intrusion of dust, sand, dirt, mud, and moisture during field use under harsh conditions. The technology consists of a pair of hand-sized protective umbilical interface housings, each containing a connector with an integrated end cap. When the end cap covers the connector, the connector is protected. Each housing has a unique lever assembly connected to the end cap that, when squeezed, flips the end cap up to expose the connector. When in the up position, the two end caps face each other. To mate the connectors, the levers on both housings are squeezed, raising the end caps, and the two umbilicals are joined and twisted to couple them. Once the connectors are mated, the levers on both housings are released. This simultaneously seals both the umbilicals and the end caps. When dealing with cryogenic connectors, a purge can be applied to the housings to prevent icing when the connectors are demated.


BENEFITS

- Protection - securely shields connectors from dust, dirt, mud, and moisture
- Rugged - withstands harsh environments and rough use (e.g., being dropped, stepped on, or rolled over)
- Cryogenic fluids transfer - housing can be purged to avoid icing when demated (e.g., liquified natural gas)
- Scalable - can be sized up or down for different-sized connectors
- Ergonomic - designed to be easily held in one hand; requires minimal pressure to open and close
- Modular - any COTS connector can be installed and swapped in a modular, universal housing

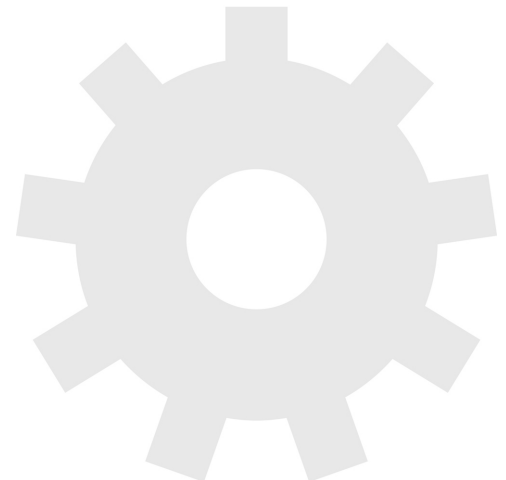

THE TECHNOLOGY

These connectors are designed to be used in harsh environments and to withstand rough handling, such as being stepped on or rolled over by wheelbarrows or light vehicles. If the demated connectors are dropped or placed on the ground, the end caps will shield them from damage and contaminants. When mated, the seal between the housings and end caps keeps contaminants out. The end caps are latched to the housings so that the caps cannot be unintentionally opened; this latch can be opened only by depressing the levers. The spring used to open or close the cap is constructed of a shape memory alloy, allowing the cap to be opened and closed an almost infinite number of times. The cap actuation levers are designed so that only a 3/4-inch pull is needed to open the cap a full 190 degrees. The housings can accept most commercial-off-the-shelf electrical or fluid connectors (including those designed for cryogenics), thus eliminating the need for specialized connectors in hostile environments. The housings can also be grounded and scaled up or down to accommodate connectors of different sizes. The housings can be constructed of steel, aluminum, composites, or even plastic, depending on the environment in which they will be used and material cost constraints.

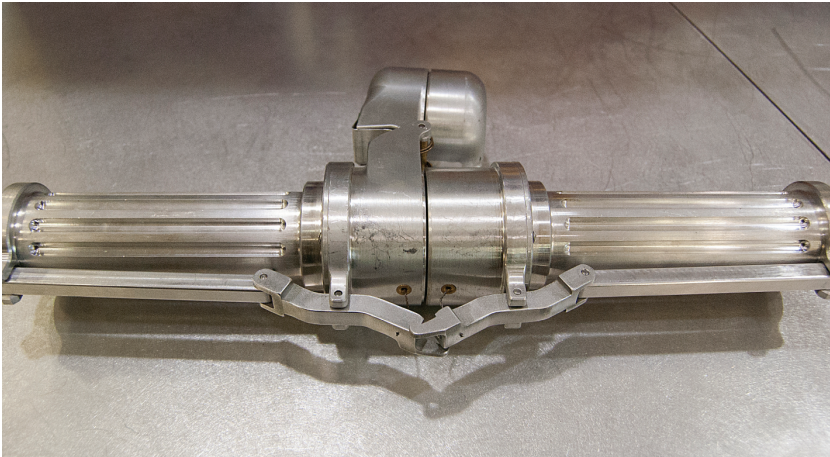

Mated connectors (end caps up)

APPLICATIONS

The technology has several potential applications:

- Military operations
- Space operations
- Desert operations
- Mining operations
- Cryogenic fluid, oil and refinery operations

PUBLICATIONS

Patent No: 9,431,778; 9,653,838

National Aeronautics and Space Administration

Agency Licensing Concierge

Kennedy Space Center

MS LASSO-012

Kennedy Space Center, FI 32899

202-358-7432

Agency-Patent-Licensing@mail.nasa.gov

www.nasa.gov

NP-2014-08-1105-HQ

technology.nasa.gov

NASA's Technology Transfer Program pursues the widest possible applications of agency technology to benefit US citizens. Through partnerships and licensing agreements with industry, the program ensures that NASA's investments in pioneering research find secondary uses that benefit the economy, create jobs, and improve quality of life.

KSC-13492, KSC-13492-DIV3, KSC-TOPS-11